

AB11803, AB12803, AB13803, AB14803, AB15803, AB16803, AB36803

Ultra Broadband RF Amplifier

This low noise ultra broadband amplifier fits ideally for LNA applications in the areas of communications or signal analysis. With Low VSWR at both ports the device can be inserted in standard 50 Ω systems without additional attenuators and is fully cascadable. The internal bias control provides constant operation conditions over a wide temperature range and allows for supply voltages that slightly differ from the specified values.


The ABxx803 amplifier can be ordered with different start frequencies from 10 kHz to 3000 MHz. Other than the standard values listed in this data sheet are available on request.

Connectors other than SMA female are available on request.


Technical Data		Unit	min	typ	max
Start Frequency (pass band)	AB11803			10	
	AB12803	kHz		100	
	AB13803			1	
	AB14803			10	
	AB15803			100	
	AB16803	MHZ		1000	
	AB36803			3000	
Stop Frequency (pass band)	all models	GHz	7.8	8.0	
Average Gain (pass band)	all models	dB	18	19	
Gain Variation (pass band)	all models	dB		± 1.5	± 1.8
Output Power (P -1dB)	all models	dBm	8	8.5	
Noise Figure (pass band > 200 MHz)	all models	dB		2.6	2.8
VSWR in (pass band)	all models			2.0	2.5
VSWR out (pass band)	all models			1.8	2.0
Positive Power Supply (current in operation)	all models	V (mA)	14.8 (70)	15 (72)	15.5 (80)
Negative Power Supply (current in operation)	all models	V (mA)	-12 (10)	-5 (7)	-5 (5)
Case Type	all models			pa-A	
Connectors	all models			SMA female	

Typical Device Data


All models

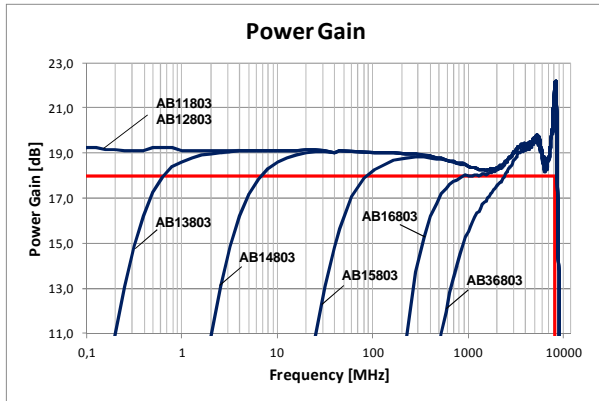


AB11803 (other models similar)

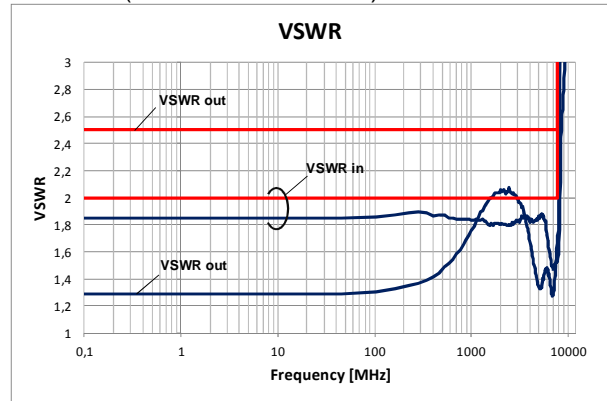


AB11803 (other models similar)

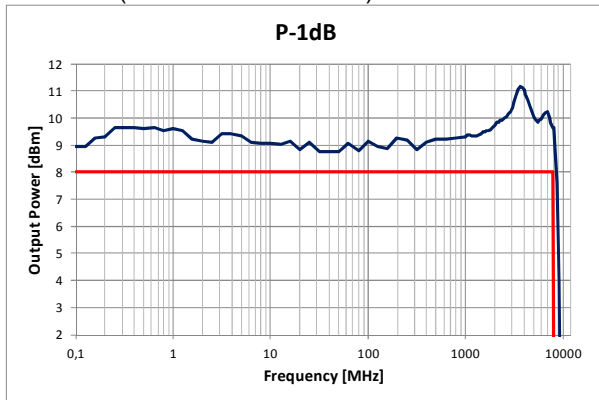

AB11803 (other models similar)

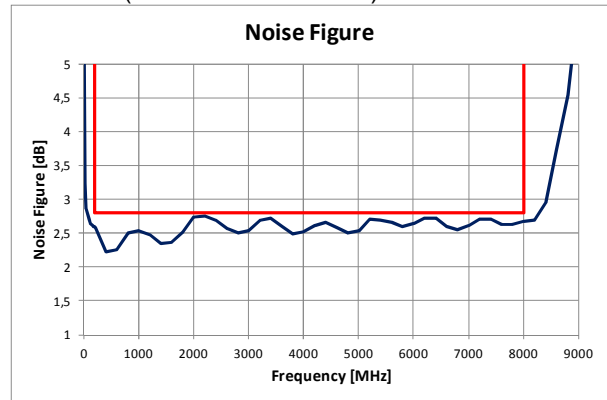

Case Dimensions (case type pa-A)

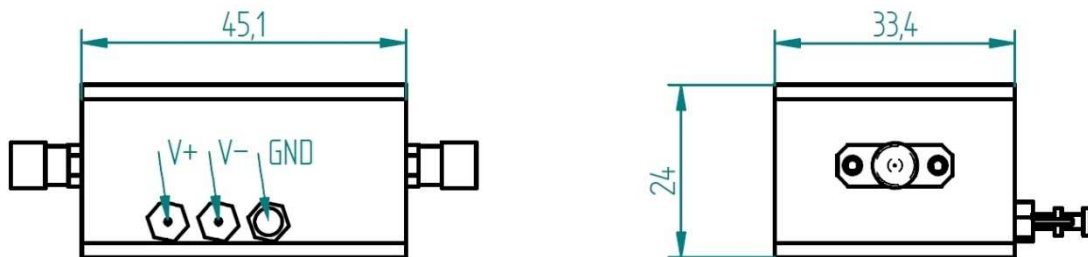

Application Notes

Each ultra-broad-band amplifier from picoamps is completely tested before shipment in order to verify the specifications given in the data sheet.

To ensure a long and reliable operation of the device please take care of the following precautions:

- To secure the input stage of the amplifier, the input cable **MUST BE UNLOADED** before connecting it to the device. Connecting a cable with a static input voltage exceeding $\pm 2V$ may severely damage the amplifier, even if the power is switched off.
- Connect input and output cables and all power cables before powering up the amplifier
- Power up the amplifier by switching on the specified voltages simultaneously within a range of $+0.5/-0.2 V$. Please note that the initial current during the power up phase of the amplifier may be substantially higher than the specified value.
- The maximum rated input power of the amplifier is 0 dBm. Signals with higher power level may severely damage the device.

To achieve long lifetime of the amplifier it is strongly recommended to apply an external heat sink, which can easily be mounted to the bottom of the amplifier case.

This data sheet is valid from January 2012. The technical data may be subject to changes without prior notice.